

LED Modular Stadium Floodlight

TSL-FL1000TS

AC220
240V

50Hz/
60Hz


PF
>0.95

Ra
>70

IP65

Features

- Compliance stds: IEC/EN60598-2-1
- Power: 720/960/1200/1500 W
- Luminous efficiency : 155Lm per watt
- Beam Angle 8°/20°/40°/60°/90°/140°*100°
- 5 years warranty
- LED lifespan up to 50,000 hours
- IP 66 and IK08 protection rating





Advantages

- Multi direction adjustable for 60 ° vertical and 120° horizontal.
- Variant beam angle optical lens, light transmittance up to 93%
- Mounting bracket adjustable at 180 degrees
- Foldable cooling fin heat sink, raise heat dissipation efficiency
- Robust structure and mounting plate
Stainless steel bolts and fasten for outstanding anti corrosion
replanceable module and simply installation

Technical specification

Model	Power	LED Source	Lumen	CRI	CCT	Dimensions(mm)
TSL-FL1000TS-720	720W	Lumileds 3030	111600Lm	>70	4000/5500K	694x268x723
TSL-FL1000TS-960	960W		148800Lm			694x268x855
TSL-FL1000TS-1200	1200W	Lumileds 3030	186000Lm	>70	4000/5500K	694x268x987
TSL-FL1000TS-1500	1500W		232500Lm			694x268x1119

Outline Dimension

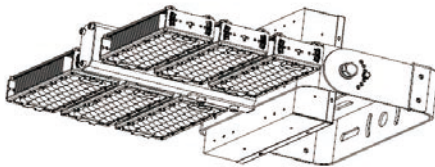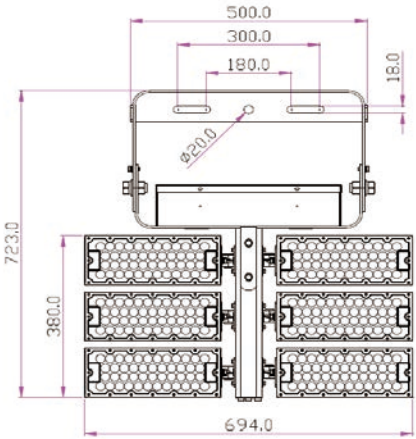

Application

Stadium, sport , airport, harbour and construction site

